


型号	描述和用途		
MS-T/R18401L	外贴式倒车雷达停车传感器		
参数			
ITEM	SPEC	Test condition 25℃	remark
Using method	Transmitter and Receiver		
Center frequency	40 ± 1.5KHz	voltage 1.5V	毫伏表输出大于1.0V 且波形有明显的变化
Sensitivity	≥ 100	AT1V/1ubar	
Max.Input Voltage	140Vp - p	AT30cm10Vrms odB-0.0002ubar	
Capacitance	1800 ± 20% PF	1KHz 0.3V	
Angle	60 ± 15dcg	AT “-6Db”	
Ring time	1.2ms Max	dedicated test socket	
Working temperature	- 40 ℃ - +80℃		



阻抗/相位、频率曲线图

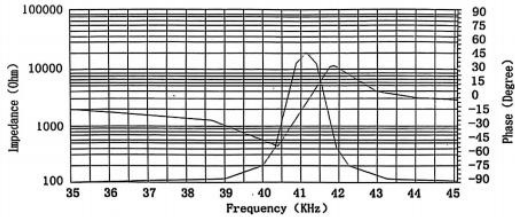

灵敏度/声压级 (10Vrms、30cm)

